


## PM1-8 Series Selection diagram 50/60Hz 3AC




The performance curves are valid for pumping air at 15°C at the inlet flanges with an air pressure of 1.013mbar and a tolerance of  $\pm 10\%$ . The total pressure differences are valid up to an intake and ambient temperature of 25°C.


Vacuum Selection diagram 50Hz

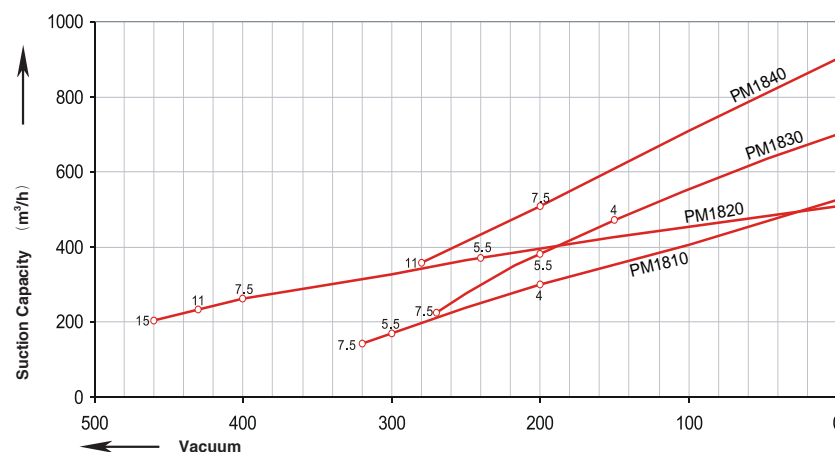

Compressor Selection Diagram 50Hz

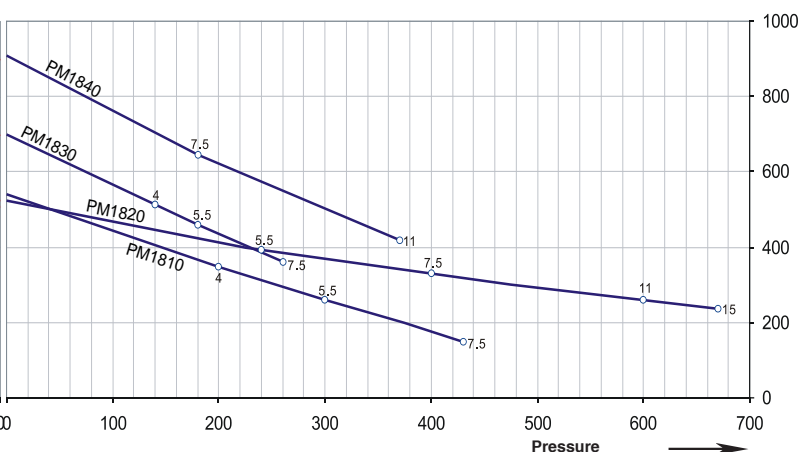

Vacuum Selection diagram 60Hz

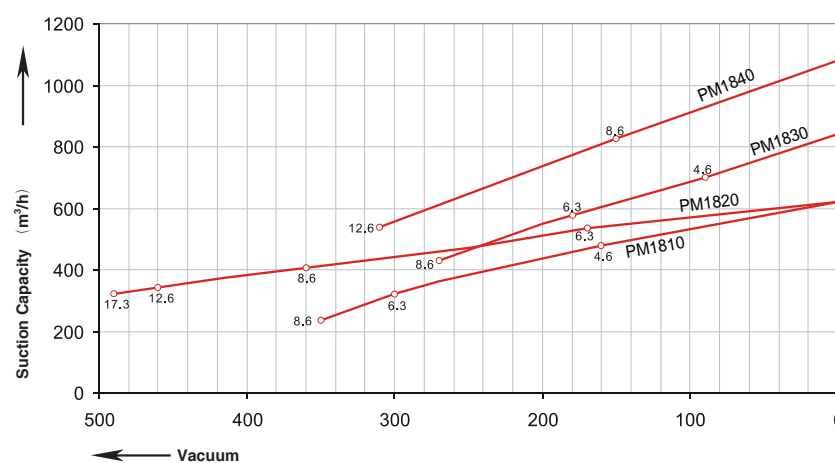

Compressor Selection Diagram 60Hz

